

AD-A279 335



**Vernier Acuity  
Through Night Vision Goggles  
(Reprint)**

By

Jeff Rabin

**DTIC**  
**ELECTE**  
**MAY 18 1994**  
**S G D**

**Aircrew Health and Performance Division**

94-14818

405 518

**April 1994**

DTIC QUALITY INSPECTED 5

Approved for public release; distribution unlimited.

**94 5 17 104**

**United States Army Aeromedical Research Laboratory  
Fort Rucker, Alabama 36362-0577**

## Notice

### Qualified requesters

Qualified requesters may obtain copies from the Defense Technical Information Center (DTIC), Cameron Station, Alexandria, Virginia 22314. Orders will be expedited if placed through the librarian or other person designated to request documents from DTIC.

### Change of address

Organizations receiving reports from the U.S. Army Aeromedical Research Laboratory on automatic mailing lists should confirm correct address when corresponding about laboratory reports.

### Disposition

Destroy this document when it is no longer needed. Do not return it to the originator.


### Disclaimer

The views, opinions, and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy, or decision, unless so designated by other official documentation. Citation of trade names in this report does not constitute an official Department of the Army endorsement or approval of the use of such commercial items.

### Human use


Human subjects participated in these studies after giving their free and informed voluntary consent. Investigators adhered to AR 70-25 and USAMRDC Reg 70-25 on Use of Volunteers in Research.


Reviewed:

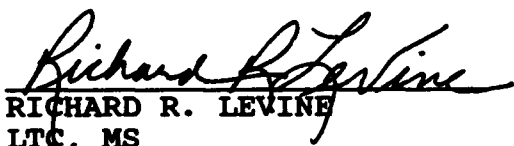  
RICHARD R. LEVINE  
LTC, MS

Director, Aircrew Health and Performance Division

Released for publication:

  
ROGER W. WILEY, O.D., Ph.D.  
Chairman, Scientific  
Review Committee

  
DAVID H. KARNEY  
Colonel, MC, SFS  
Commanding

Unclassified

## SECURITY CLASSIFICATION OF THIS PAGE

## REPORT DOCUMENTATION PAGE

Form Approved  
OMB No. 0704-0188

1a. REPORT SECURITY CLASSIFICATION Unclassified			1b. RESTRICTIVE MARKINGS		
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION/AVAILABILITY OF REPORT Approved for public release; distribution unlimited		
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE			5. MONITORING ORGANIZATION REPORT NUMBER(S)		
4. PERFORMING ORGANIZATION REPORT NUMBER(S)  USAARL Report No. 94-17			7a. NAME OF MONITORING ORGANIZATION U.S. Army Medical Research Development, Acquisition and Logistics Command (Provisional)		
6a. NAME OF PERFORMING ORGANIZATION U.S. Army Aeromedical Research Laboratory		6b. OFFICE SYMBOL (if applicable) SGRD-UAS-VS	7b. ADDRESS (City, State, and ZIP Code) Fort Detrick Frederick, MD 21702-5012		
6c. ADDRESS (City, State, and ZIP Code) P.O. Box 620577 Ft. Rucker, AL 36362-0577		9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER			
8a. NAME OF FUNDING / SPONSORING ORGANIZATION		8b. OFFICE SYMBOL (if applicable)	10. SOURCE OF FUNDING NUMBERS		
8c. ADDRESS (City, State, and ZIP Code)		PROGRAM ELEMENT NO. 62787A	PROJECT NO. 3016278 7A879	TASK NO. PE	WORK UNIT ACCESSION NO. 164
11. TITLE (Include Security Classification)  Vernier Acuity through Night Vision Goggles					
12. PERSONAL AUTHOR(S) Jeff Rabin					
13a. TYPE OF REPORT Final		13b. TIME COVERED FROM _____ TO _____		14. DATE OF REPORT (Year, Month, Day) 1994 April	
15. PAGE COUNT 3					
16. SUPPLEMENTARY NOTATION Printed in <u>Optometry and Vision Science</u> , April 1993, Pages 689-691.					
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)		
FIELD	GROUP	SUB-GROUP	Night vision goggles, image intensifiers, vernier acuity, contrast sensitivity		
17	05				
09	01				
19. ABSTRACT (Continue on reverse if necessary and identify by block number)  Night vision goggles (NVG) are being used increasingly in military and civilian environments. Despite the use of these devices, relatively few tests exist to assess visual performance through NVGs. Hyperacuity tasks may provide a sensitive index of performance through night vision devices. In this study, grating vernier acuity was measured through NVGs. As reported previously, a power law relation was observed between vernier acuity and stimulus contrast. Comparison of vernier acuity with and without NVGs indicated that performance is limited by the contrast transfer of the device. Vernier acuity measurements can be used to assess the quality of vision and quantity of contrast transferred through night vision devices.					
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT <input checked="" type="checkbox"/> UNCLASSIFIED/UNLIMITED <input type="checkbox"/> SAME AS RPT. <input type="checkbox"/> DTIC USERS			21. ABSTRACT SECURITY CLASSIFICATION Unclassified		
22a. NAME OF RESPONSIBLE INDIVIDUAL Chief, Scientific Information Center			22b. TELEPHONE (Include Area Code) (205) 255-6907		22c. OFFICE SYMBOL SGRD-UAX-SI

*instruments/techniques*

## Vernier Acuity through Night Vision Goggles

JEFF RABIN\*

U.S. Army Aeromedical Research Laboratory, Fort Rucker, Alabama

### ABSTRACT

Night vision goggles (NVG's) are being used increasingly in military and civilian environments. Despite the use of these devices, relatively few tests exist to assess visual performance through NVG's. Hyperacuity tasks may provide a sensitive index of performance through night vision devices. In this study, grating vernier acuity was measured through NVG's. As reported previously, a power law relation was observed between vernier acuity and stimulus contrast. Comparison of vernier acuity with and without NVG's indicated that performance is limited by the contrast transfer of the device. Vernier acuity measurements can be used to assess the quality of vision and quantity of contrast transferred through night vision devices.

**Key Words:** night vision goggles, image intensifiers, vernier acuity, contrast sensitivity

Military operations are often conducted at night or under conditions of limited visibility. These operations require high levels of performance in environments lacking sufficient ambient illumination to support normal visual function. Image intensifying devices [night vision goggles (NVG's)] amplify ambient illumination, making performance possible under extreme and limited conditions. Despite their usefulness NVG's present a view of the world that is isochromatic and lacking in contrast and detail. It is essential to understand factors which limit vision through NVG's so that performance can be anticipated under various conditions.

Several techniques have been used to assess visual performance of NVG's such as visual acuity, contrast sensitivity, and stereopsis.<sup>1-4</sup> Another approach for evaluating vision through NVG's is vernier acuity—the precision with which two targets can be aligned. Like stereopsis, vernier acuity is a type of "hyperacuity" because, under optimal conditions, it is better than the acuity predicted from the separation between photoreceptors.<sup>5</sup> Research

has shown that vernier acuity depends on stimulus contrast.<sup>6-9</sup> Because NVG display contrast is difficult to measure and varies with ambient conditions, evaluation of the contrast dependency of vernier acuity offers an adjunctive approach for assessing the effective contrast to the observer.

In the present study, vernier acuity was measured through third-generation NVG's. The red phosphor of a color monitor was used to stimulate the NVG's which have peak spectral sensitivity in the near infrared. Vernier acuity was assessed over a range of stimulus contrasts to characterize the contrast dependency of the response. Measurements were also obtained without the NVG, but at the same display luminance to estimate contrast transfer through the device.

### METHODS

The stimulus for testing NVG's was generated on a high-resolution color monitor. Only the red gun of the phosphor was used to limit the spectral composition of the stimulus to the spectral range of NVG's. Although NVG's have peak sensitivity in the near infrared (750 nm), little infrared radiation is emitted by the red gun so its output between 600 to 720 nm forms the primary stimulus. Because the shape of the phosphor spectral output function remains constant with software-controlled changes in monitor intensity, it was possible to introduce accurate changes in contrast to the NVG by varying the red gun intensity in known steps. Neutral density (ND) filters were used to reduce the overall monitor luminance to a value estimated to be between one-quarter moon and starlight conditions.<sup>10</sup> This level was used because it corresponds to a moderate level of stimulation to NVG's and is below the intensity level which activates the NVG automatic brightness control. This made it possible to test at an extended viewing distance without any change in display luminance imposed by the brightness control.

The stimulus for vernier acuity was a 1.4° circular patch of vertical, square-wave grating with a spatial frequency of 6 cpd surrounded by a uniform field of the same mean luminance. This spatial frequency

Received November 24, 1992; revision received April 5, 1993.  
\*O.D., Ph.D.

was chosen because it is associated with good vernier acuity<sup>3</sup> and is within the spatial bandpass of the NVG for the light level used.<sup>4</sup> In addition, the spatial frequency was high enough to make the effects of higher harmonics in the square-wave stimulus negligible. The top half of the grating was fixed in spatial phase; the horizontal position of the bottom half was adjustable in pixel steps by keyboard control. The subject viewed the grating monocularly with the right eye at a distance of 4.8 m. The method of adjustment was used in which the subject depressed keyboard buttons to shift the bottom half of the grating left or right until it appeared aligned with the top half. After 3 min of adaptation to the mean luminance of the NVG display, 10 alignment settings were made at each of 5 Michelson contrasts ranging from 4 to 66% in 0.3 log unit steps. The contrasts were presented in ascending order to reduce successive adaptation effects. For each contrast the standard deviation of 10 settings was used as the vernier threshold.

In separate sessions, measurements were obtained from the same subjects with a simulation of the NVG display. The same grating stimulus was used, but modulated in contrast using the green gun of the monitor to simulate the green phosphor (P20) of the NVG display. ND filters were used to reduce the monitor luminance to the NVG display luminance used in this study (0.4 ft-L). The same procedures were used as described for the NVG measurements to obtain vernier thresholds for each of the five grating contrasts.

Five subjects participated in this study. Each subject was male, 21 to 22 years of age, and had no refractive error with visual acuities of 6/6 (20/20).

## RESULTS

Fig. 1 shows mean ( $\pm 1$  SE) vernier acuity from five subjects plotted against stimulus contrast for NVG and simulated NVG conditions. The NVG test was conducted through the device, whereas the simulation indicates performance without the device, but at the same display luminance and color. In both viewing conditions, vernier acuity improved with stimulus contrast. Although display luminance and color were the same in the two conditions, vernier acuity was consistently reduced when viewing through NVG's (mean decrement = 2.7 $\times$ ). This difference between NVG and simulated conditions, and the improvement in vernier acuity with contrast were statistically significant effects (Friedman two-way analysis of variance;  $\chi^2 = 8.0$ ,  $p < 0.005$ ).

Previous studies reported a power law relation between vernier acuity and contrast.<sup>6-8</sup> The results shown in Fig. 1a are also best described by power law functions with exponents of -0.81 for the NVG condition ( $r^2 = 0.92$ ), and -0.73 for the simulated condition ( $r^2 = 0.93$ ). These values are comparable to those reported in previous studies, and indicate that a 10-fold reduction in contrast will produce a 5 to 7 $\times$  reduction in vernier performance through NVG's.

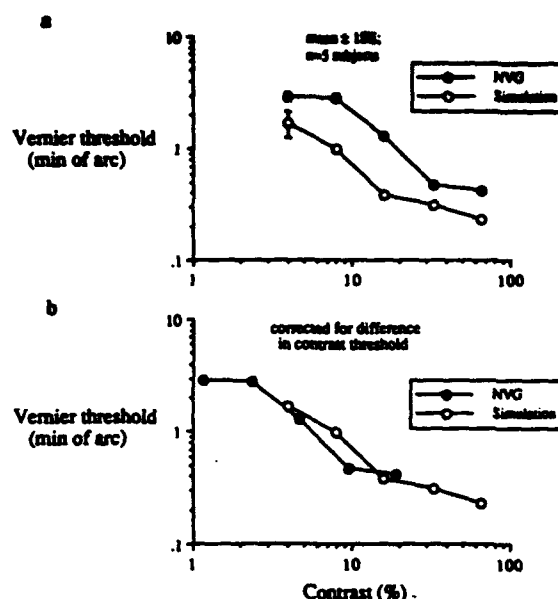


Figure 1. Mean ( $\pm 1$  SE) vernier thresholds from five subjects are plotted against stimulus contrast for NVG and simulated-NVG conditions (a). The same data are plotted in (b), but corrected for the difference in contrast thresholds. This was done by shifting the NVG data leftward along the contrast axis by a factor of 3.4 $\times$ —the ratio of NVG/simulation detection thresholds.

The fact that vernier acuity was 2 to 3 $\times$  better in the simulated condition indicates that performance through the NVG was limited by electro-optical properties of the device. This limitation could not be attributed to the luminance or color of the display because they were matched in the two conditions. It is also unlikely that resolution limited performance because the spatial frequency used was lower than the resolution limit of both the NVG and the human visual system. It is more likely that the effective contrast to the observer was attenuated through the NVG, perhaps because of the addition of electro-optical noise. Correction for this contrast reduction should lessen the difference in vernier acuity between NVG and simulated-NVG conditions. Fig. 1b shows mean vernier acuities corrected for the difference in contrast threshold with and without the NVG. All values conform to a common function when corrected for this contrast difference—a factor of 3.4 $\times$ . Recent studies have also shown that differences in vernier acuity across mechanisms (e.g., luminance vs. color) diminish when contrast is scaled relative to detection threshold.<sup>9,11</sup> These findings underscore the fundamental importance of system modulation transfer functions for explaining and predicting visual performance.

## DISCUSSION

This study quantified vernier performance through NVG's. As shown in previous studies,<sup>6-8</sup> a power law relation was observed between vernier

acuity and stimulus contrast. The exponent of this relation ( $-0.8$ ) was about the same as that reported by Bradley and Skottun<sup>8</sup> using a similar grating stimulus. The dependency of vernier acuity on contrast indicates that stimulus conditions or device factors which reduce contrast through NVG's will impair vernier alignment performance (e.g., targeting tasks). Design features which mitigate against contrast loss are essential for optimal alignment performance through NVG's.

A comparison of vernier acuity through NVG's to measurements obtained without the device but at the same luminance and color revealed substantial differences in vernier acuity. Vernier thresholds through NVG's were an average of 2 to 3 $\times$  higher than values obtained under comparable conditions of luminance and chromaticity. This reduction in vernier acuity could not be attributed to the brightness, color, or resolution of the NVG display, but could be explained by the difference in contrast sensitivity with and without the NVG. The difference in vernier performance between real and simulated conditions was essentially eliminated by correcting stimulus contrast for threshold differences with and without the NVG device.

Current military standards for image intensifiers include requirements for resolution, gain, and distortion. Vernier acuity offers an additional metric for grading the quality and quantity of vision through NVG's. Subtle distortion or contrast attenuation which may elude detection by standard techniques could reduce vernier acuity through NVG's. This approach will prove useful in the future assessment of night vision devices.

## REFERENCES

1. Wiley RW, Holly FF. Vision with the AN/PVS-5 night vision goggle. U.S. Army Aeromedical Research Laboratory. Fort Rucker, AL: 1976.
2. Levine RR, Rash CE. Attenuating the luminous output of the AN/PVS-5A night vision goggles and its effects on visual acuity. U.S. Army Aeromedical Research Laboratory. Fort Rucker, AL: 1989; USAARL Report No. 89-24.
3. Wiley RW. Visual acuity and stereopsis with night vision goggles. U.S. Army Aeromedical Research Laboratory. Fort Rucker, AL: 1989; USAARL Report No. 89-9.
4. Kotulak JC, Rash CE. Visual acuity with second and third generation night vision goggles obtained from a new method of night sky simulation across a wide range of target contrasts. U.S. Army Aeromedical Research Laboratory. Fort Rucker, AL: 1992; USAARL Report No. 92-9.
5. Westheimer G. Visual acuity and hyperacuity. Invest Ophthalmol 1975;14:570-2.
6. Foley-Fischer JA. Contrast, edge-gradient, and target line width as factors in vernier acuity. Optica Acta 1977;24:179-86.
7. Wilson HR. Responses of spatial mechanisms can explain hyperacuity. Vision Res 1986;26:453-69.
8. Bradley A, Skottun BC. Effects of contrast and spatial frequency on vernier acuity. Vision Res 1987;27:1817-24.
9. Krauskopf J, Farrell B. Vernier acuity: effects of chromatic content, blur and contrast. Vision Res 1991;31:735-49.
10. RCA Electro-Optics Handbook. Electro-optics handbook technical series EOH-11. Lancaster: RCA Corp, 1974.
11. Kooi FL, De Valois RL, Switkes E. Spatial localization across channels. Vision Res 1991;31:1627-32.

## AUTHOR'S ADDRESS:

Jeff Rabin  
U.S. Army Aeromedical Research Laboratory  
Attn: SGRD-UAS-VS (MAJ Rabin)  
P.O. Box 620577  
Fort Rucker, Alabama 36362-0577

Accession For	
NTIS CRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution /	
Availability Codes	
Dist	Avail and/or Special
A-1	20

### Initial distribution

Commander, U.S. Army Natick Research,  
Development and Engineering Center  
ATTN: SATNC-MIL (Documents  
Librarian)  
Natick, MA 01760-5040

Library  
Naval Submarine Medical Research Lab  
Box 900, Naval Sub Base  
Groton, CT 06349-5900

Chairman  
National Transportation Safety Board  
800 Independence Avenue, S.W.  
Washington, DC 20594

Executive Director, U.S. Army Human  
Research and Engineering Directorate  
ATTN: Technical Library  
Aberdeen Proving Ground, MD 21005

Commander  
10th Medical Laboratory  
ATTN: Audiologist  
APO New York 09180

Commander  
Man-Machine Integration System  
Code 602  
Naval Air Development Center  
Warminster, PA 18974

Naval Air Development Center  
Technical Information Division  
Technical Support Detachment  
Warminster, PA 18974

Commander  
Naval Air Development Center  
ATTN: Code 602-B  
Warminster, PA 18974

Commanding Officer, Naval Medical  
Research and Development Command  
National Naval Medical Center  
Bethesda, MD 20814-5044

Commanding Officer  
Armstrong Laboratory  
Wright-Patterson  
Air Force Base, OH 45433-6573

Deputy Director, Defense Research  
and Engineering  
ATTN: Military Assistant  
for Medical and Life Sciences  
Washington, DC 20301-3080

Director  
Army Audiology and Speech Center  
Walter Reed Army Medical Center  
Washington, DC 20307-5001

Commander, U.S. Army Research  
Institute of Environmental Medicine  
Natick, MA 01760

Commander/Director  
U.S. Army Combat Surveillance  
and Target Acquisition Lab  
ATTN: SFAE-IEW-JS  
Fort Monmouth, NJ 07703-5305

**Director**  
**Federal Aviation Administration**  
**FAA Technical Center**  
**Atlantic City, NJ 08405**

**Commander, U.S. Army Test**  
**and Evaluation Command**  
**ATTN: AMSTE-AD-H**  
**Aberdeen Proving Ground, MD 21005**

**Naval Air Systems Command**  
**Technical Air Library 950D**  
**Room 278, Jefferson Plaza II**  
**Department of the Navy**  
**Washington, DC 20361**

**Director**  
**U.S. Army Ballistic**  
**Research Laboratory**  
**ATTN: DRXBR-OD-ST Tech Reports**  
**Aberdeen Proving Ground, MD 21005**

**Commander**  
**U.S. Army Medical Research**  
**Institute of Chemical Defense**  
**ATTN: SGRD-UV-AO**  
**Aberdeen Proving Ground,**  
**MD 21010-5425**

**Commander**  
**USAMRDALC**  
**ATTN: SGRD-RMS**  
**Fort Detrick, Frederick, MD 21702-5012**

**Director**  
**Walter Reed Army Institute of Research**  
**Washington, DC 20307-5100**

**HQ DA (DASG-PSP-O)**  
**5109 Leesburg Pike**  
**Falls Church, VA 22041-3258**

**Harry Diamond Laboratories**  
**ATTN: Technical Information Branch**  
**2800 Powder Mill Road**  
**Adelphi, MD 20783-1197**

**U.S. Army Materiel Systems**  
**Analysis Agency**  
**ATTN: AMXSYP-PA (Reports Processing)**  
**Aberdeen Proving Ground**  
**MD 21005-5071**

**U.S. Army Ordnance Center**  
**and School Library**  
**Simpson Hall, Building 3071**  
**Aberdeen Proving Ground, MD 21005**

**U.S. Army Environmental**  
**Hygiene Agency**  
**ATTN: HSHB-MO-A**  
**Aberdeen Proving Ground, MD 21010**

**Technical Library Chemical Research**  
**and Development Center**  
**Aberdeen Proving Ground, MD**  
**21010-5423**

**Commander**  
**U.S. Army Medical Research**  
**Institute of Infectious Disease**  
**ATTN: SGRD-UIZ-C**  
**Fort Detrick, Frederick, MD 21702**

**Director, Biological**  
**Sciences Division**  
**Office of Naval Research**  
**600 North Quincy Street**  
**Arlington, VA 22217**

**Commander**  
**U.S. Army Materiel Command**  
**ATTN: AMCDE-XS**  
**5001 Eisenhower Avenue**  
**Alexandria, VA 22333**



**Commandant**  
**U.S. Army Aviation**  
**Logistics School ATTN: ATSQ-TDN**  
**Fort Eustis, VA 23604**

**Headquarters (ATMD)**  
**U.S. Army Training**  
**and Doctrine Command**  
**ATTN: ATBO-M**  
**Fort Monroe, VA 23651**

**IAF Liaison Officer for Safety**  
**USAF Safety Agency/SEFF**  
**9750 Avenue G, SE**  
**Kirtland Air Force Base**  
**NM 87117-5671**

**Naval Aerospace Medical**  
**Institute Library**  
**Building 1953, Code 03L**  
**Pensacola, FL 32508-5600**

**Command Surgeon**  
**HQ USCENTCOM (CCSG)**  
**U.S. Central Command**  
**MacDill Air Force Base, FL 33608**

**Air University Library**  
**(AUL/LSE)**  
**Maxwell Air Force Base, AL 36112**

**U.S. Air Force Institute**  
**of Technology (AFIT/LDEE)**  
**Building 640, Area B**  
**Wright-Patterson**  
**Air Force Base, OH 45433**

**Henry L. Taylor**  
**Director, Institute of Aviation**  
**University of Illinois-Willard Airport**  
**Savoy, IL 61874**

**Chief, National Guard Bureau**  
**ATTN: NGB-ARS**  
**Arlington Hall Station**  
**111 South George Mason Drive**  
**Arlington, VA 22204-1382**

**Commander**  
**U.S. Army Aviation and Troop Command**  
**ATTN: SGRD-UAX-AL**  
**4300 Goodfellow Blvd., Building 105**  
**St. Louis, MO 63120**

**U.S. Army Aviation and Troop Command**  
**Library and Information Center Branch**  
**ATTN: AMSAV-DIL**  
**4300 Goodfellow Boulevard**  
**St. Louis, MO 63120**

**Federal Aviation Administration**  
**Civil Aeromedical Institute**  
**Library AAM-400A**  
**P.O. Box 25082**  
**Oklahoma City, OK 73125**

**Commander**  
**U.S. Army Medical Department**  
**and School**  
**ATTN: Library**  
**Fort Sam Houston, TX 78234**

**Commander**  
**U.S. Army Institute of Surgical Research**  
**ATTN: SGRD-USM**  
**Fort Sam Houston, TX 78234-6200**

**AAMRL/HEX**  
**Wright-Patterson**  
**Air Force Base, OH 45433**

**John A. Dellinger,**  
**Southwest Research Institute**  
**P. O. Box 28510**  
**San Antonio, TX 78284**

**Product Manager**  
**Aviation Life Support Equipment**  
**ATTN: AMCPM-ALSE**  
**4300 Goodfellow Boulevard**  
**St. Louis, MO 63120-1798**

**Commander and Director**  
**USAE Waterways Experiment Station**  
**ATTN: CEWES-IM-MI-R,**  
**CD Department**  
**3909 Halls Ferry Road**  
**Vicksburg, MS 39180-6199**

**Commanding Officer**  
**Naval Biodynamics Laboratory**  
**P.O. Box 24907**  
**New Orleans, LA 70189-0407**

**Assistant Commandant**  
**U.S. Army Field Artillery School**  
**ATTN: Morris Swott Technical Library**  
**Fort Sill, OK 73503-0312**

**Mr. Peter Seib**  
**Human Engineering Crew Station**  
**Box 266**  
**Westland Helicopters Limited**  
**Yeovil, Somerset BA20 2YB UK**

**U.S. Army Dugway Proving Ground**  
**Technical Library, Building 5330**  
**Dugway, UT 84022**

**U.S. Army Yuma Proving Ground**  
**Technical Library**  
**Yuma, AZ 85364**

**AFFTC Technical Library**  
**6510 TW/TSTL**  
**Edwards Air Force Base,**  
**CA 93523-5000**

**Commander**  
**Code 3431**  
**Naval Weapons Center**  
**China Lake, CA 93555**

**Aeromechanics Laboratory**  
**U.S. Army Research and Technical Labs**  
**Ames Research Center, M/S 215-1**  
**Moffett Field, CA 94035**

**Sixth U.S. Army**  
**ATTN: SMA**  
**Presidio of San Francisco, CA 94129**

**Commander**  
**U.S. Army Aeromedical Center**  
**Fort Rucker, AL 36362**

**Strughold Aeromedical Library**  
**Document Service Section**  
**2511 Kennedy Circle**  
**Brooks Air Force Base, TX 78235-5122**

**Dr. Diane Damos**  
**Department of Human Factors**  
**ISSM, USC**  
**Los Angeles, CA 90089-0021**

**U.S. Army White Sands**  
**Missile Range**  
**ATTN: STEWS-IM-ST**  
**White Sands Missile Range, NM 88002**

**U.S. Army Aviation Engineering**  
**Flight Activity**  
**ATTN: SAVTE-M (Tech Lib) Stop 217**  
**Edwards Air Force Base, CA 93523-5000**

**Ms. Sandra G. Hart**  
**Ames Research Center**  
**MS 262-3**  
**Moffett Field, CA 94035**

Commander  
USAMRDALC  
ATTN: SGRD-UMZ  
Fort Detrick, Frederick, MD 21702-5009

Commander  
U.S. Army Health Services Command  
ATTN: HSOP-SO  
Fort Sam Houston, TX 78234-6000

U. S. Army Research Institute  
Aviation R&D Activity  
ATTN: PERI-IR  
Fort Rucker, AL 36362

Commander  
U.S. Army Safety Center  
Fort Rucker, AL 36362

U.S. Army Aircraft Development  
Test Activity  
ATTN: STEBG-MP-P  
Cairns Army Air Field  
Fort Rucker, AL 36362

Commander  
USAMRDALC  
ATTN: SGRD-PLC (COL R. Gifford)  
Fort Detrick, Frederick, MD 21702

TRADOC Aviation LO  
Unit 21551, Box A-209-A  
APO AE 09777

Netherlands Army Liaison Office  
Building 602  
Fort Rucker, AL 36362

British Army Liaison Office  
Building 602  
Fort Rucker, AL 36362

Italian Army Liaison Office  
Building 602  
Fort Rucker, AL 36362

Directorate of Training Development  
Building 502  
Fort Rucker, AL 36362

Chief  
USAHEL/USAAVNC Field Office  
P. O. Box 716  
Fort Rucker, AL 36362-5349

Commander, U.S. Army Aviation Center  
and Fort Rucker  
ATTN: ATZQ-CG  
Fort Rucker, AL 36362

Chief  
Test & Evaluation Coordinating Board  
Cairns Army Air Field  
Fort Rucker, AL 36362

Canadian Army Liaison Office  
Building 602  
Fort Rucker, AL 36362

German Army Liaison Office  
Building 602  
Fort Rucker, AL 36362

French Army Liaison Office  
USAAVNC (Building 602)  
Fort Rucker, AL 36362-5021

Australian Army Liaison Office  
Building 602  
Fort Rucker, AL 36362

Dr. Garrison Rapmund  
6 Burning Tree Court  
Bethesda, MD 20817

**Commandant, Royal Air Force  
Institute of Aviation Medicine  
Farnborough, Hampshire GU14 6SZ UK**

**Defense Technical Information  
Cameron Station, Building 5  
Alexandra, VA 22304-6145**

**Commander, U.S. Army Foreign Science  
and Technology Center  
AIFRTA (Davis)  
220 7th Street, NE  
Charlottesville, VA 22901-5396**

**Commander  
Applied Technology Laboratory  
USARTL-ATCOM  
ATTN: Library, Building 401  
Fort Eustis, VA 23604**

**Commander, U.S. Air Force  
Development Test Center  
101 West D Avenue, Suite 117  
Eglin Air Force Base, FL 32542-5495**

**Aviation Medicine Clinic  
TMC #22, SAAF  
Fort Bragg, NC 28305**

**Dr. H. Dix Christensen  
Bio-Medical Science Building, Room 753  
Post Office Box 26901  
Oklahoma City, OK 73190**

**Commander, U.S. Army Missile  
Command  
Redstone Scientific Information Center  
ATTN: AMSMI-RD-CS-R  
/ILL Documents  
Redstone Arsenal, AL 35898**

**Director  
Army Personnel Research Establishment  
Farnborough, Hants GU14 6SZ UK**

**U.S. Army Research and Technology  
Laboratories (AVSCOM)  
Propulsion Laboratory MS 302-2  
NASA Lewis Research Center  
Cleveland, OH 44135**

**Commander  
USAMRDALC  
ATTN: SGRD-ZC (COL John F. Glenn)  
Fort Detrick, Frederick, MD 21702-5012**

**Dr. Eugene S. Channing  
166 Baughman's Lane  
Frederick, MD 21702-4083**

**U.S. Army Medical Department  
and School  
USAMRDALC Liaison  
ATTN: HSMC-FR  
Fort Sam Houston, TX 78234**

**Dr. A. Kornfield, President  
Biosearch Company  
3016 Revere Road  
Drexel Hill, PA 29026**

**NVESD  
AMSEL-RD-NV-ASID-PST  
(Attn: Trang Bui)  
10221 Burbeck Road  
Fort Belvoir, VA 22060-5806**

**CA Av Med  
HQ DAAC  
Middle Wallop  
Stockbridge, Hants S020 8DY UK**

**Dr. Christine Schlichting**  
**Behavioral Sciences Department**  
**Box 900, NAVUBASE NLON**  
**Groton, CT 06349-5900**

**Commander, HQ AAC/SGPA**  
**Aerospace Medicine Branch**  
**162 Dodd Boulevard, Suite 100**  
**Langley Air Force Base,**  
**VA 23665-1995**

**Commander**  
**Aviation Applied Technology Directorate**  
**ATTN: AMSAT-R-T**  
**Fort Eustis, VA 23604-5577**

**Director**  
**Aviation Research, Development**  
**and Engineering Center**  
**ATTN: AMSAT-R-Z**  
**4300 Goodfellow Boulevard**  
**St. Louis, MO 63120-1798**

**Commander**  
**USAMRDALC**  
**ATTN: SGRD-ZB (COL C. Fred Tyner)**  
**Fort Detrick, Frederick, MD 21702-5012**

**Director**  
**Directorate of Combat Developments**  
**ATTN: ATZQ-CD**  
**Building 515**  
**Fort Rucker, AL 36362**